



# HAZE

**POWER TO KEEP  
YOU ON THE MOVE**

www.hazebattery.com

**ELECTRIC VEHICLE** applications are wide and varied with many durability & power demands placed firmly on the batteries shoulders.

**HAZE ELECTRIC VEHICLE AGM** always delivers when you need it, whatever your DC requirement in general EV applications.



Photo shows same case size and terminal orientation


**Tough ABS case with INSERT TERMINALS** as standard, smaller sizes with FASTON.

**Special Active Material Formulation & AGM Technology** delivers cranking amps, general power and long/deep discharges.

**GOOD CYCLE LIFE** and resistance to mechanical stress and the elements all in one battery.

	Dimensions mm - kg						Dimensions Inches - lbs						Cold Cranking Amps		
	Length	Width	Height Auto	Height Insert	Height Battery	Weight	Length	Width	Height Auto	Height Insert	Height Battery	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)
<b>HZB-EV12-55EX</b>	229	138	231	214	213	18.1	13.16	7.93	13.28	12.30	12.24	39.91	690	603	462

	Volts	Thread size mm	Reserve Capacity - Mins					Capacity - Ampere Hour*						
			75 Amps	<b>25 Amps</b>	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	<b>20 Hr</b>	10 Hr	5 Hr	3 Hr	1 Hr
<b>HZB-EV12-55EX</b>	12	6	26	108	145	205	430	74.2	69.7	64.5	60.0	56.0	50.5	39.0

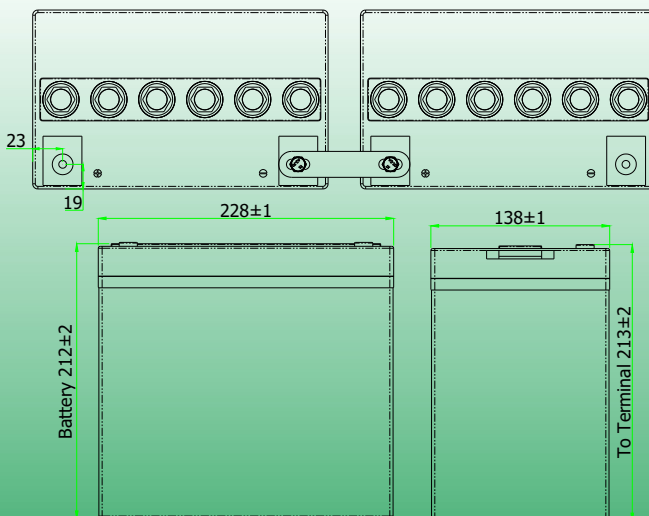

**EV Charging** - To obtain maximum cycle life from your EV battery it is important that a suitable charging profile is used. For information about the Haze range of chargers and the **Haze recommended charging profile** contact your local Haze distributor.

**NOTE:** All Haze AGM batteries are true cycling batteries, plate chemistry is specifically for cyclic applications.

**HAZE ELECTRIC VEHICLE AGM** delivers maximum capacity within five cycles and keeps delivering long after the others are on the scrap heap. HAZE R&D has resulted in **SPECIAL CHEMICAL** and **PROCESS** technology to ensure consistency and performance.